




DESCRIPTION:

Easy Entry Pre-Insulated Crimp Terminals are made from oxygen-free high conductivity copper. They are electro-tin plated for excellent conductivity and resistance to corrosion. Push-On terminals are made from brass, while the insulated types benefit from an additional internal copper sleeve, ensuring insulation support and a good crimp joint.

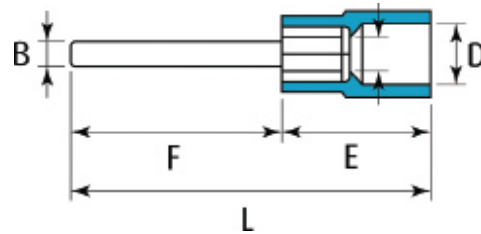

SPECIFICATION:

PVC:

MATERIAL: Electro-tin plated copper
INSULATION: Polyvinyl Chloride
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 75°C
MAX VOLTAGE: 600V



NYLON:

MATERIAL: Electro-tin plated copper
INSULATION: Nylon
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 105°C
MAX VOLTAGE: 600V



PART NUMBERS:

COLOUR/WIRE Ø mm ²	PART NO.		Max. elect. rating (A)	DIMENSIONS (mm)						PACK QTY
	PVC	NYLON		B	L	F	E	D	D1	
0.5-1.5 RED	CIB1-10	CNIB1-10	19	2.4	20.5	10.5	10.0	4.1	1.7	100
	CIB1-11	CNIB1-11	19	3.0	21.0	11.0	10.0	4.1	1.7	100
	CIB1-14	CNIB1-14	19	3.0	24.0	14.0	10.0	4.1	1.7	100
	CIB1-18	CNIB1-18	19	2.4	28.0	18.0	10.0	4.1	1.7	100
1.5-2.5 BLUE	CIB2-10	CNIB2-10	27	2.4	20.5	10.5	10.0	4.5	2.3	100
	CIB2-18	CNIB2-18	27	2.4	28.0	18.0	10.0	4.5	2.3	100
4-6 YELLOW	CIB3-10	CNIB3-10	48	2.8	23.0	10.5	12.5	6.5	3.4	50
	CIB3-18	CNIB3-18	48	3.0	30.5	18.0	12.5	6.5	3.4	50



Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297