

Rittal – The System.

Faster – better – everywhere.

Plastic enclosures AX with viewing window – AX 1454.000

Date : Mar 4, 2021

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Plastic enclosures AX with viewing window – AX 1454.000

created: 04.03.2021 build on www.rittal.com/uk-en

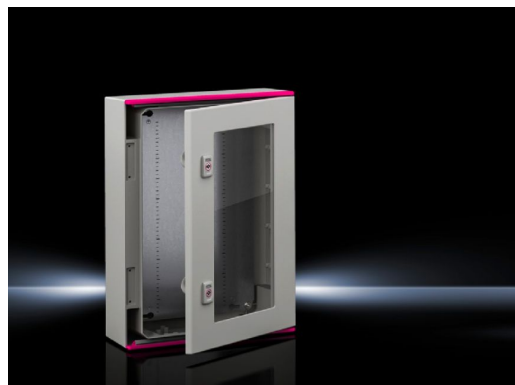

Product description

Design:	with viewing window
Applications:	Ambient temperature range: -30 °C...+75 °C The specified temperatures may be limited by the installed equipment
Material:	Enclosure and door: Fibreglass-reinforced unsaturated polyester Door: All-round foamed-in PU seal Mounting plate: Sheet steel Viewing window: Polycarbonate Fire protection corresponding to UL 94-V0 Halogen free
Surface finish:	Enclosure and door: Dyed plastic with no after-treatment Mounting plate: Zinc-plated
Colour:	Similar to RAL 7035
Protection category IP to IEC 60 529:	IP 56
Protection category NEMA:	NEMA 12
Type rating to UL 508A:	Type 12
IK Code:	IK08
Protection class:	II (at 1000 V AC)
Supply includes:	Enclosure with hinged door with viewing window, of all-round solid construction, 3 mm

double-bit lock
Door hinged on the right, may be swapped to the left
Mounting plate
Twin seal on the top and bottom edges of the door as integral rain protection strip

Note:	Interior installation screws are required to secure components inside the enclosure Components such as punched sections with mounting flanges may be attached on a 25 mm pitch pattern using the universal bracket
Basic material:	Plastic
Product description	
Dimensions:	Width: 500 mm Height: 500 mm Depth: 300 mm
Viewing window:	yes
Material thickness:	Mounting plate: 3 mm
Mounting plate:	Width: 405 mm Height: 425 mm
Number of cam locks:	2
Packs of:	1 pc(s).
Weight/pack:	14.2 kg
EAN:	4028177006768
Customs tariff number:	94037000
ETIM 7.0:	EC000261
ETIM 6.0:	EC000261
eCl@ss 8.0/8.1:	27180101
eCl@ss 6.0/6.1:	27180101
Product description:	AX plastic enclosures with viewing window, WHD: 500 x 500 x 300 mm
Approvals	
Approvals:	UL + C-UL

Certificates: Negative certificate

Declarations: Declaration of conformity
