




DESCRIPTION:

Easy Entry Pre-Insulated Crimp Terminals are made from oxygen-free high conductivity copper. They are electro-tin plated for excellent conductivity and resistance to corrosion. Push-On terminals are made from brass, while the insulated types benefit from an additional internal copper sleeve, ensuring insulation support and a good crimp joint.

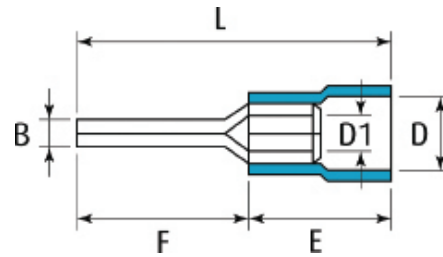

SPECIFICATION:

PVC:

MATERIAL: Electro-tin plated copper
INSULATION: Polyvinyl Chloride
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 75°C
MAX VOLTAGE: 600V



NYLON:

MATERIAL: Electro-tin plated copper
INSULATION: Nylon
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 105°C
MAX VOLTAGE: 600V



PART NUMBERS:

COLOUR/WIRE Ø mm ²	PART NO.		Max. elect. rating (A)	DIMENSIONS (mm)						PACK QTY
	PVC	NYLON		B	L	F	E	D	D1	
0.5-1.5 RED	CIP1-10	CNIP1-10	19	1.9	20.5	10.5	10.0	4.1	1.7	100
	CIP1-12	CNIP1-12	19	1.9	22.5	12.5	10.0	4.1	1.7	100
1.5-2.5 BLUE	CIP2-10	CNIP2-10	27	1.9	20.5	10.5	10.0	4.5	2.3	100
	CIP2-12	CNIP2-12	27	1.9	22.5	12.5	10.0	4.5	2.3	100
4-6 YELLOW	CIP3-14	CNIP3-14	48	2.8	26.5	14.0	12.5	6.5	3.4	50



Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297